


3225(1210)Size chip capacitors : MCH32

- High capacitance
- Achieved high capacitance by thin and multi layer technology
- Lead-free plating terminal
- No polarity

■ Quick Reference

The design and specifications are subject to change without prior notice. Before ordering or using, please check the latest technical specifications. For more detail information regarding temperature characteristic code and packaging style code, please check product destination.




● Range of thermal compensation capacitors

MCH32	Temperature	A,AN(CG) (COG) (CH) Characteristic		Packing style code
	Rated voltage(V)	50V		
	Product thickness(mm)	2.5±0.3		
	Capacitance(pF)	100,000		
Capacitance tolerance		J(±5%)		K, P
Nominal capacitance series		—		

● Range of high dielectric constant capacitors

MCH32	Temperature	CN(R) (B) (X7R)Characteristic	CN(X5R)Characteristic	FN(F) (Y5V)Characteristic		Packing style code
	Rated voltage(V)	16V	10V	16V	16V	
	Product thickness(mm)	2.0±0.2	2.3±0.2	2.0±0.2		
	Capacitance(pF)	4,700,000~10,000,000	15,000,000~22,000,000	22,000,000	47,000,000	
Capacitance tolerance		M(±20%)		Z(+80%, -20%)		K, P
Nominal capacitance series		E6		E3		

■ External dimensions (Unit : mm)

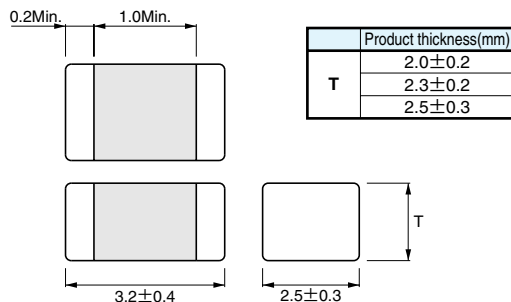

■ Production designation

Part No.

M C H 3 2 3 F N 2 2 6 Z K

Rated voltage

Code	Voltage
4	10V
3	16V
5	50V

Code	Product thickness	Packing specification	Reel	Basic ordering unit(pcs.)
K	0.85mm	Paper tape(width 8mm, pitch 4mm)	φ 180mm (7in.)	4,000
P	2.3mm	Pulastic tape(width 8mm, pitch 4mm)	φ 180mm (7in.)	1,000
P	2.5mm	Pulastic tape(width 12mm, pitch 4mm)	φ 180mm (7in.)	1,000

Reel (φ 180mm): compatible with EIAJ ET-7200A

Packing style

Capacitance-temperature characteristics				Nominal capacitance	Capacitance tolerance	
Code	EIA code	Operating temp. range(°C)	Temp. coefficient or percent change		Code	Tolerance
A,AN	CG (COG)	-55~+125	0±30ppm/°C	3-digit designation according to IEC	J	±5% (11pF or more)
	CH	-55~+125	0±60ppm/°C		M	±20%
	R	-55~+125	±15%		Z	+80%, -20%
CN	B	-25~+85	±10%	3-digit designation according to IEC	M	±20%
	(X5R)	(-55~+85)	(±15%)			
	(X7R)	(-55~+125)	(±15%)			
FN	F	-25~+85	+30%, -80%	3-digit designation according to IEC	Z	+80%, -20%
	(Y5V)	(-30~+85)	(+22%, -82%)			

■ Product No. list

● Thermal compensation capacitors

Capacitance (pF)	Temperature		A•AN(CG) (COG) (CH) Characteristic	
	Rated voltage(V)		50V	
	Tolerance	Product thickness(mm)	Product No.	
100,000	J(±5%)	2.5±0.3	MCH325A(AN) 104JP	


● High dielectric constant capacitors

Capacitance (pF)	Temperature		CN(R) (B) (X7R) Characteristic	CN(X5R) Characteristic
	Rated voltage(V)		16V	16V
	Tolerance	Product thickness(mm)	Product No.	
4,700,000	K(±10%)	2.0±0.2	MCH323CN475MP	
6,800,000			MCH323CN685MP	
10,000,000			MCH323CN106MP	
15,000,000		2.3±0.2		MCH324CN156MP
22,000,000				MCH324CN226MP


Capacitance (pF)	Temperature		FN(F) (Y5V) Characteristic	
	Rated voltage(V)		16V	10V
	Tolerance	Product thickness(mm)	Product No.	
22,000,000	Z(+80%, -20%)	2.0±0.2	MCH323FN226ZP	
47,000,000				MCH324FN476ZP

■ Characteristics


● A (CG) (C0G) (CH) Characteristics

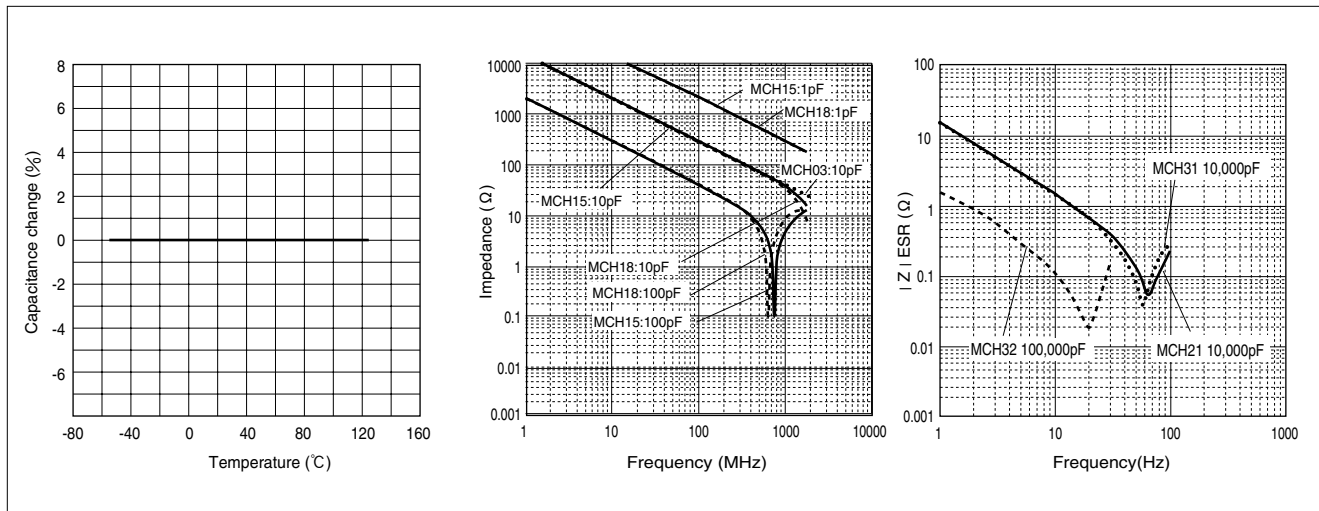

● CN (R) (B) (X5R) (X7R) Characteristics

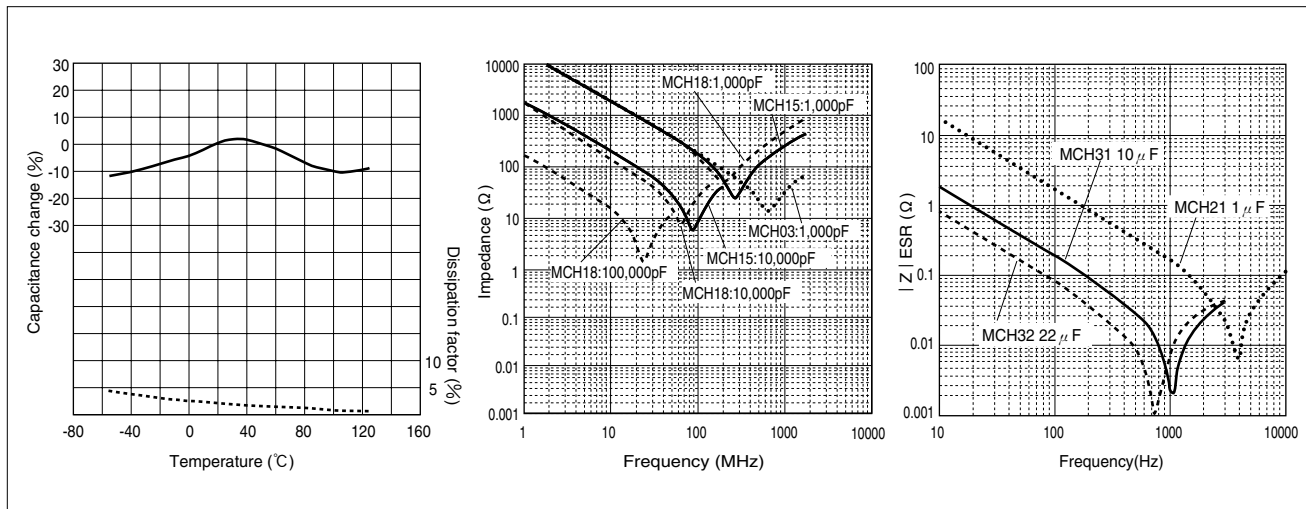


● FN (F) (Y5V) Characteristics

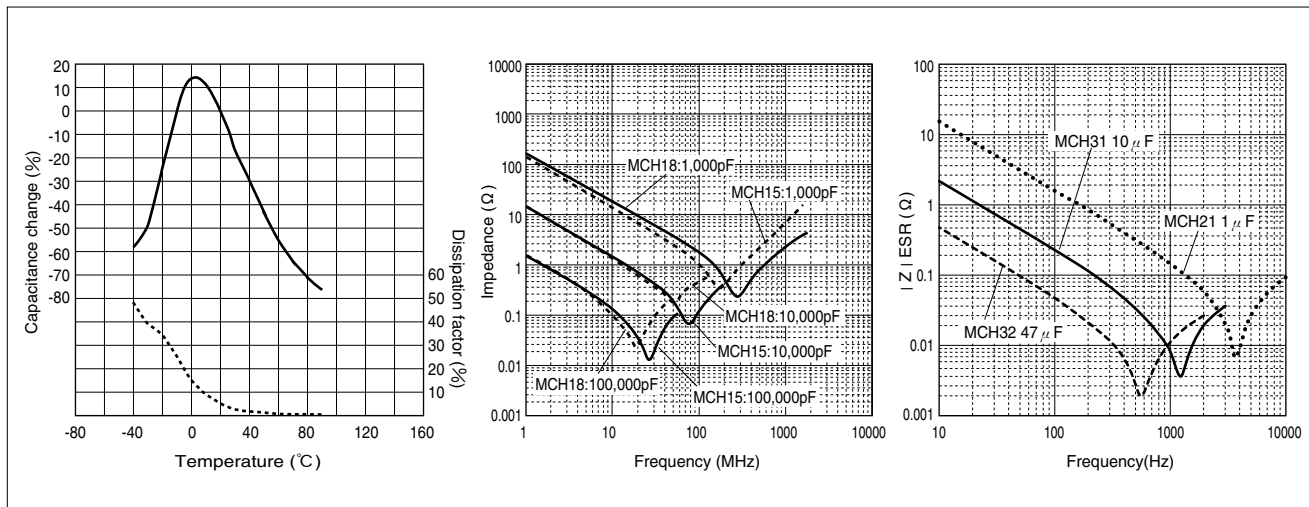

■ Packing specification


● Carrier tape dimensions (Unit:mm)

MCH03




Code	A	B	C	D	E	F	H	J	t	t1
MCH03	0.37 ±0.03	0.67 ±0.03	8.0 ±0.2	3.5 ±0.05	1.75 ±0.1	2.0 ±0.05	4.0 ±0.1	φ1.5 +0.1 0	0.42 ±0.02	0.5 MAX

MCH15




Code	A	B	C	D	E	F	H	J	t	t1
MCH15	0.65 ±0.05	1.15 ±0.05	8.0 ±0.2	3.5 ±0.05	1.75 ±0.1	2.0 ±0.05	4.0 ±0.1	φ1.5 +0.1 0	0.7 ±0.05	0.8 MAX

MCH18

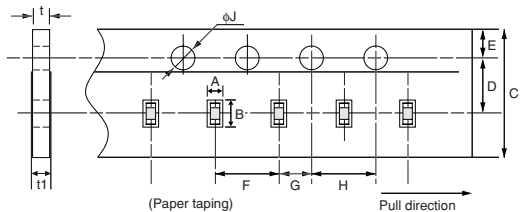


Code	A	B	C	D	E	F	G	H	J	t	t1
MCH18	1.0 ±0.05	1.8 ±0.05	8.0 ±0.3	3.5 ±0.05	1.75 ±0.1	4.0 ±0.1	2.0 ±0.05	4.0 ±0.1	φ1.5 +0.1 0	1.05 MAX.	1.2 MAX.

MCH21

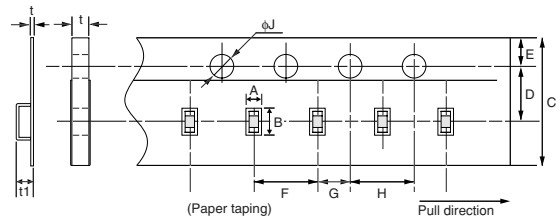


Code	A	B	C	D	E	F	G	H	J	t	t	t1
										Paper	Pulastic	
MCH21	1.5 ±0.2	2.3 ±0.2	8.0 ±0.3	3.5 ±0.05	1.75 ±0.1	4.0 ±0.1	2.0 ±0.05	4.0 ±0.1	φ1.5 +0.1 0	1.1 MAX.	0.3 MAX.	2.5 MAX.

MCH31

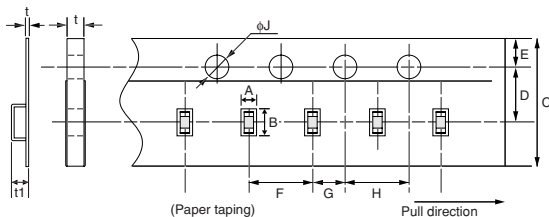

Code	A	B	C	D	E	F	G	H	J	t	t	t1
										Paper	Pulastic	
MCH31	1.9 ±0.2	3.5 ±0.2	8.0 ±0.3	3.5 ±0.05	1.75 ±0.1	4.0 ±0.1	2.0 ±0.05	4.0 ±0.1	φ1.5 +0.1 0	1.1 MAX.	0.3 MAX.	2.5 MAX.


MCH32

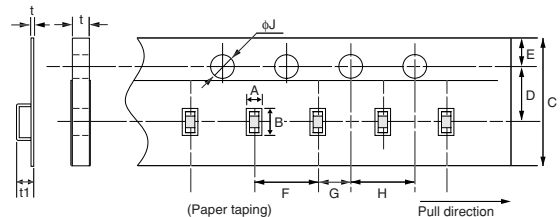

Code	A	B	C	D	E	F	G	H	J	t	t1
										Pulastic	
MCH32	2.9	3.6	8.0±0.3 (12.0±0.3)	3.5±0.05 (5.0±0.03)	1.75 ±0.1	4.0 ±0.1	2.0 ±0.05	4.0 ±0.1	φ1.5 +0.1 0	0.6 MAX.	2.5MAX. (6.5MAX.)


() 内は製品厚みの2.5mmに適用

MCH43

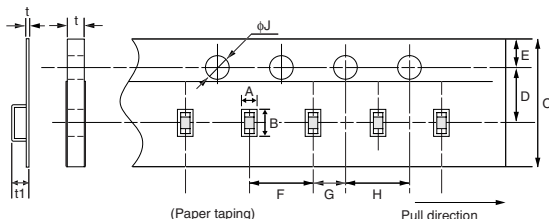

Code	A	B	C	D	E	F	G	H	J	t	t1
										Pulastic	
MCH43	3.6	4.9	12.0 ±0.3	5.5 ±0.05	1.75 ±0.1	8.0 ±0.1	2.0 ±0.05	4.0 ±0.1	φ1.5 +0.1 0	0.6 MAX.	6.5 MAX.



MCH55

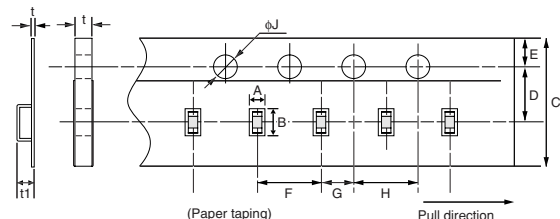


Code	A	B	C	D	E	F	G	H	J	t	t1
										Pulastic	
MCH55	5.4	6.1	12.0 ±0.3	5.5 ±0.05	1.75 ±0.1	8.0 ±0.1	2.0 ±0.05	4.0 ±0.1	φ1.5 +0.1 0	0.6 MAX.	6.5 MAX.

■ Packing specification

● Reel dimensions (Unit:mm)

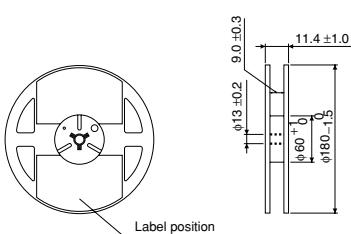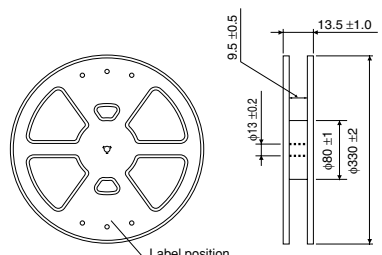φ 180mm Plastic reel	φ 330mm Plastic reel
MCH03 MCH15 MCH18 MCH21 MCH31 MCH32 MCH43 MCH55 	MCH15 MCH18 

● Bulk case dimensions (Unit:mm)

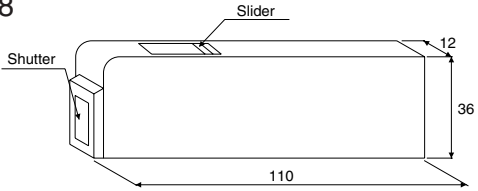EIAJ ET-7201A compliant
MCH15 MCH18 

- For fundamental considerations on capacitors, refer to Electric Industries Association of Japan, technical report, "EIAJ RCR-2333, Guideline of notabilia for fixed multilayer ceramic capacitors for use in electronic equipment".

- The contents described herein are correct as of Sep, 2003.
- ROHM assumes no responsibility for the use of any circuits described herein, conveys no license under any patent or other right, and makes no representations that the circuits are free from patent infringement. Specifications subject to change without notice for the purpose of improvement.

The products listed in this catalog are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys). Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Excellence in Electronics

ROHM

ROHM CO., LTD.

21, Saiin Mizosaki-cho, Ukyo-ku, Kyoto
615-8585, Japan
TEL: (075)311-2121 FAX: (075)315-0172
URL: <http://www.rohm.com>

Contact us for further information about the products.

Atlanta U.S.A. / ROHM ELECTRONICS EASTERN SALES DIVISION
(DIVISION OF ROHM ELE.U.S.A.,LLC.)
TEL: +1(770)754-5972 FAX: +1(770)754-0691

Dallas U.S.A. / ROHM ELECTRONICS CENTRAL SALES DIVISION
(DIVISION OF ROHM ELE.U.S.A.,LLC.)
TEL: +1(972)312-8818 FAX: +1(972)312-0330

San Diego U.S.A. / ROHM ELECTRONICS WESTERN SALES DIVISION
(DIVISION OF ROHM ELE.U.S.A.,LLC.)
TEL: +1(858)625-3630 FAX: +1(858)625-3670

Germany / ROHM ELECTRONICS GERMANY SALES DIVISION
(DIVISION OF ROHM ELECTRONICS GMBH.)
TEL: +49(2154)9210 FAX: +49(2154)921400

United Kingdom / ROHM ELECTRONICS UK SALES DIVISION
(DIVISION OF ROHM ELECTRONICS GMBH.)
TEL: +44(1)908-282-666 FAX: +44(1)908-282-528

France / ROHM ELECTRONICS FRANCE SALES DIVISION
(DIVISION OF ROHM ELECTRONICS GMBH.)
TEL: +33(1)41 23 14 00 FAX: +33(1)41 23 14 30

Hong Kong China / ROHM ELECTRONICS (H.K.) CO., LTD.
TEL: +852(2)7406262 FAX: +852(2)3758971

Shanghai China / ROHM ELECTRONICS (SHANGHAI) CO., LTD.
TEL: +86(21)6279-2727 FAX: +86(21)6247-2066

Dalian China / ROHM ELECTRONICS TRADING (DALIAN) CO., LTD.
TEL: +86(41)1230-8549 FAX: +86(41)1230-8537

Beijing China / BEIJING REPRESENTATIVE OFFICE
TEL: +86(10)8451-2426 FAX: +86(10)6460-9518

Taiwan / ROHM ELECTRONICS TAIWAN CO., LTD.
TEL: +886(2)2500-6956 FAX: +886(2)2503-2869

Korea / ROHM ELECTRONICS KOREA CORPORATION
TEL: +82(2)8182-700 FAX: +82(2)8182-715

Singapore / ROHM ELECTRONICS ASIA PTE. LTD. (RES/REI)
TEL: +65-332-2322 FAX: +65-332-5662

Malaysia / ROHM ELECTRONICS (MALAYSIA) SDN. BHD.
TEL: +60(3)7958-8355 FAX: +60(3)7958-8377

Philippines / ROHM ELECTRONICS (PHILIPPINES) SALES CORPORATION
TEL: +63(2)807-6872 FAX: +63(2)809-1422

Thailand / ROHM ELECTRONICS (THAILAND) CO., LTD.
TEL: +66(2)254-4890 FAX: +66(2)256-6334